

In order to output the game to the TV set please remove the resistor on the "EM3"

After remove the 'EM3'




1.

1. Apply the insulating film on the metal surface.




**Connect "AV" pad of the black backlight PCB to the "Pin 1" pad of the mainboard of the console by a wire**

**Connect "G" pad of the black backlight PCB to the "GND" pad of the mainboard of the console by a wire.**

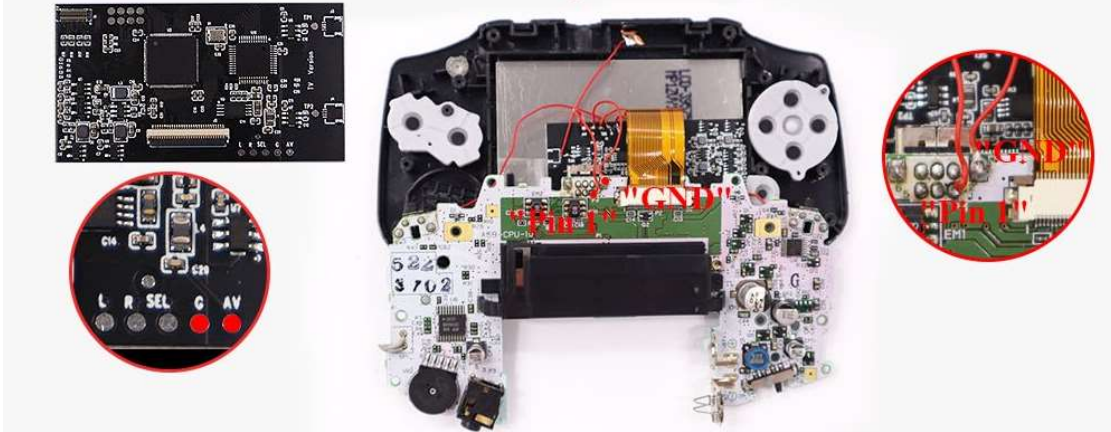

**Connect SEL to the TP2, please check this picture.**

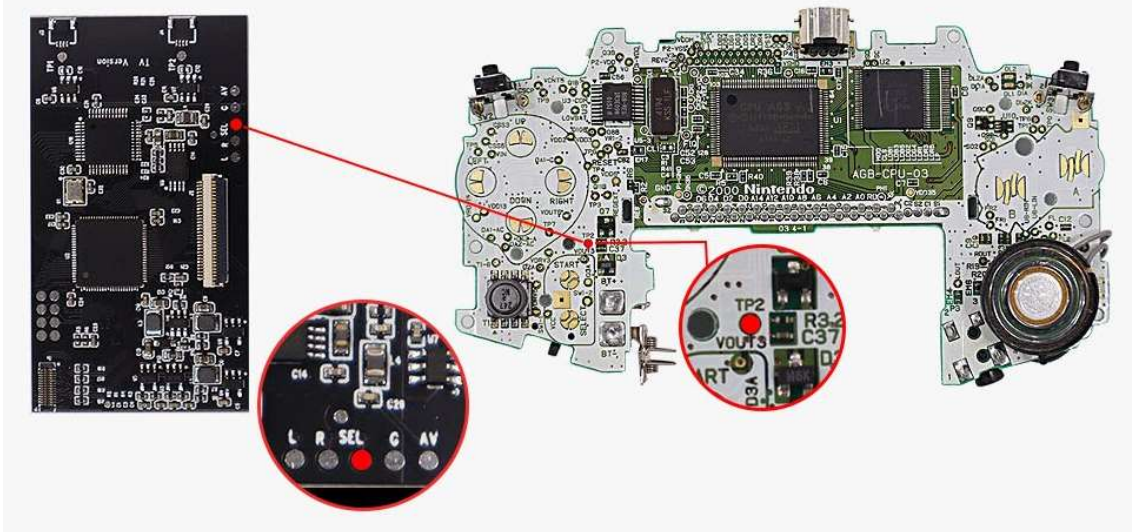

**Connect L,R to Motherboard's L,R like the picture**

